

# ORIGIN

Smoke detector

Nexelec



## Connected

Remote maintenance without entering the home



## Interconnection

Up to 25 interconnected sensors and accessories



## Design

Facilitates acceptance of the detector by residents

## Digital detector logbook


QR Code + application for monitoring installation and maintenance of a fleet of detectors

## Electronic maintenance certificate

After each maintenance operation, a unique certificate is recorded in the detector's secure NFC chip

## Anti-tear detection

Triggers an alert message in the application if the detector is removed from its mounting base

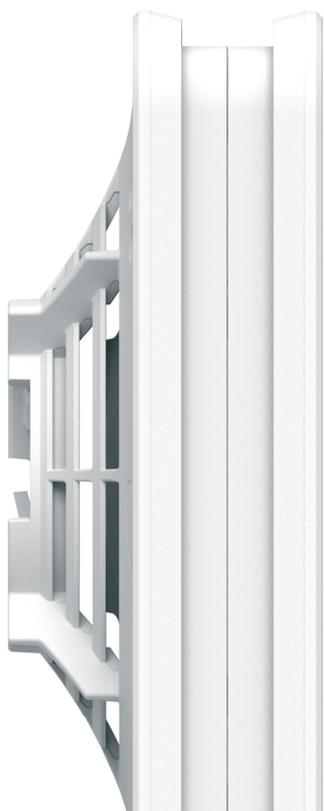

## Compatible with 3M adhesive mounting<sup>(1)</sup>

CE and NF approved for installation without screws or plugs. No need to drill hazardous substrates (asbestos)

## Universally compatible mounting base<sup>(1)</sup>

Simplifies replacement of other brands of detectors without drilling new mounting holes

## Rip-off protection

Lockable mounting base to reduce the risk of detector removal

## Reduce false alarms

Electronic self-compensation for dust in the detection chamber

## Remote surveillance compatible<sup>(1)</sup>

To report fire alarms, remove doubts or request on-site intervention by an approved company



# ORIGIN

Smoke detector

Nexelec

www.nexelec.fr

Reference	Battery	Radio
X865LS	10 years	LoRaWAN



Net weight: 150 g (including battery and stand)

## FUNCTIONS



### 10-year battery<sup>(2)</sup>

Sealed and welded lithium battery



### Air 360°

Exclusive detection technology. Simplifies maintenance by residents

TEST

### Test/Silence button

Large, easy-to-reach touch button on front panel



### Silence function

Stops the alarm and/or puts the detector on standby for 10 minutes without removing it from its base



### Compact mounting base

Only 3 cm in diameter to avoid damaging the installation surface



### Insect barrier

Pest protection grid integrated into the detector



### Signal light

Discreet LED indicator in standby mode, powerful in alarm mode



### Powerful audible alarm

85 dB at 3 metres to quickly alert occupants



### 8-hour beep delay

Temporarily silences fault beeps until detector is replaced

## FEATURES

### Smoke

Technology: Photoelectric smoke detector  
Optical smoke detection by diffused light (Tyndall effect)

### Choice of connectivity



### Set contents

1 detector  
1 mounting base  
2 nylon screws and plugs  
1 user manual

### Terms of use

Indoor environment  
Temperature: -10°C to +50°C  
Humidity: 0% RH to 99% RH (non-condensing)

### Mounting type

Wall or ceiling

### Warranty<sup>(3)</sup>

5 years

### Certification

EN14604



<sup>(1)</sup> Optional accessory or function available on request. <sup>(2)</sup> The battery is designed for a non-guaranteed life of 10 years; battery life may vary. Please refer to the «Precautions and Limitations» section of the user manual.

<sup>(3)</sup> Please refer to the «Warranty» section of the user manual.